

5 Reasons Vinyl Siding Remains the Top Home Exterior Design Choice

Did you know? Vinyl siding is the primary cladding material on nearly one third of all new homes built.¹

1 Boosts Curb Appeal

THE COLOURS of Mitten Siding & Accessories are certified through the Vinyl Siding Institute (VSI) Product Certification Program for colour retention.

Its unmatched selection of profiles, shapes, textures and colours makes vinyl siding ideal for any home renovation.

Those who re-sided their homes with vinyl siding recouped more than 73% of that cost when selling.²

2 Never Absorbs Water

MITTEN SIDING & ACCESSORIES is weather resistant, fade resistant and insect resistant.³

-  WEATHER RESISTANT
-  FADE RESISTANT
-  INSECT RESISTANT

3 Never Requires Painting

MITTEN SIDING & ACCESSORIES are third-party tested and certified for quality and colour retention. The colour is inside the product, not on top of the surface. It does not crack, peel or fade.

Vinyl siding requires no painting or caulking, just simple cleaning with a garden hose.



4 High Performance

-  VIRTUALLY INDESTRUCTIBLE
-  RESISTS WIND SPEEDS UP TO 165 MPH/263KPH

5 Peace of Mind



MITTEN SIDING & ACCESSORIES are backed by industry-leading warranties that last the lifetime of a home and transfer to the next owner.

-  LIMITED LIFETIME WARRANTY
 -  **MITTEN** BUILDING PRODUCTS
1. Canadian Consumer Protection Report - 2011 Home Improvement Research Center
2. 2017 Cost vs. Value Report, Remodeling Magazine
3. Vinyl Siding is not a waterproofing barrier and must be installed according to manufacturer's instructions.



Take the guesswork out of your exterior makeover, try different products and colour combinations. You can use one of our stock photos, or upload and customize a photo of your own home.

Visit the **Mitten Visualizer** section of www.mittensiding.com

MITTEN BUILDING PRODUCTS **OREGONPRIDE**[®]
40 SERIES VINYL SIDING

MITTEN BUILDING PRODUCTS **OREGONPRIDE**[®]
40 SERIES VINYL SIDING



MITTEN[®]
BUILDING PRODUCTS

5A - 225 HENRY STREET • BRANTFORD, ONTARIO N3S 7R4
800.265.0774 (T) • 866.257.2168 (F) • MITTENSIDING.COM

Authorized Dealer/Distributor



49-810-105-00 MIT 01/20

MITTEN[®]
BUILDING PRODUCTS

Our traditional product line, offering a wide selection of profiles in classic .040" thick panels. Profiles feature a subtle wood-grain appearance.

Performance Features:



COLOUR MATCHED ALUMINUM & ACCESSORIES



CLASSIC .040" THICKNESS



HURRICANE FORCE WIND SPEED RATED



CONTOURED LOCK SYSTEM



ROLL-OVER NAIL HEM



LOW GLOSS COLOUR-RICH FINISH



LIFETIME COLOUR FADE PROTECTION




LIMITED LIFETIME WARRANTY



Subtle painted cedar texture shown in Brownstone

Due to the printing process colours may not be exactly as shown. Please refer to actual samples before making final decisions. Inquire with your distributor to confirm colours and products.

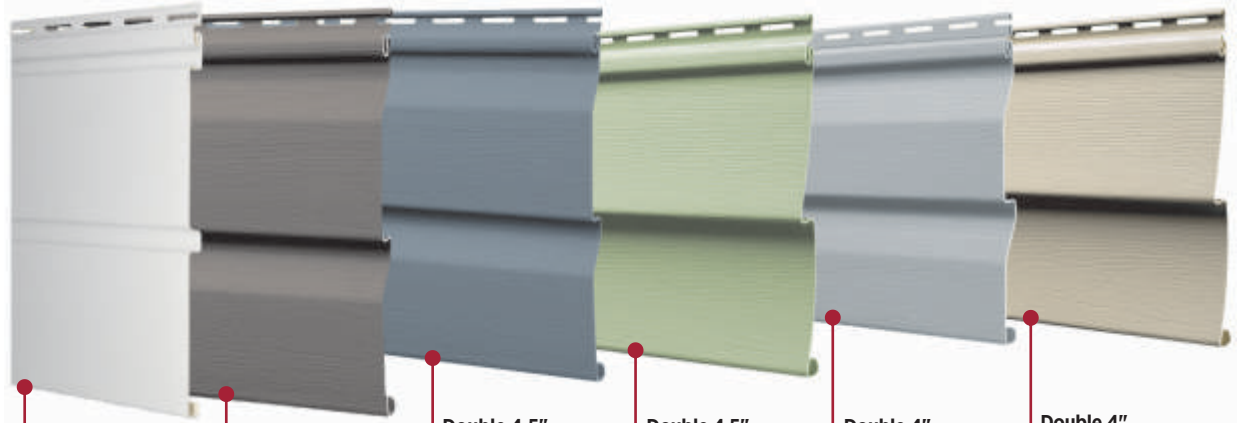

Double 5" Vertical

Shown in Frost

Length/Pc: 12' / 3.66m

Width/Pc: 10" / 25.4cm

Panels/Ctn: 20

Coverage/Ctn: 200 sq. ft. / 18.58 m²

Nom. Thickness: .040" / 1.02 mm

Windload Data: NA

Double 5" Dutchlap

Shown in Brownstone

Length/Pc: 12' / 3.66m

Width/Pc: 10" / 25.4cm

Panels/Ctn: 20

Coverage/Ctn: 200 sq. ft. / 18.58 m²

Nom. Thickness: .040" / 1.02 mm

Windload Data: 140 mph / 225 KM/h

Double 4.5" Dutchlap

Shown in Indigo

Length/Pc: 12'1" / 3.68m

Width/Pc: 9" / 22.86cm

Panels/Ctn: 22

Coverage/Ctn: 200 sq. ft. / 18.58 m²

Nom. Thickness: .040" / 1.02 mm

Windload Data: 140 mph / 225 KM/h

Double 4.5" Horizontal

Shown in Cypress

Length/Pc: 12'1" / 3.68m

Width/Pc: 9" / 22.86cm

Panels/Ctn: 22

Coverage/Ctn: 200 sq. ft. / 18.58 m²

Nom. Thickness: .040" / 1.02 mm

Windload Data: 140 mph / 225 KM/h

Double 4" Dutchlap

Shown in Nickel

Length/Pc: 12'6" / 3.81cm

Width/Pc: 8" / 20.32cm

Panels/Ctn: 24

Coverage/Ctn: 200 sq. ft. / 18.58 m²

Nom. Thickness: .040" / 1.02 mm

Windload Data: 140 mph / 225 KM/h

Double 4" Horizontal

Shown in Hearthstone

Length/Pc: 12'6" / 3.81m

Width/Pc: 8" / 20.32cm

Panels/Ctn: 24

Coverage/Ctn: 200 sq. ft. / 18.58 m²

Nom. Thickness: .040" / 1.02 mm

Windload Data: 140 mph / 225 KM/h

Natural Standard Colours:

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Frost

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Bone

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Ivory

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Cypress

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Stratus

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Flagstone

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Brownstone

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Clay

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Hearthstone

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Sandalwood

D4H
D4.5DL
D5V
Ash

D4H
D4.5DL
D5V
Sandcastle

D4H
D4.5DL
D5V
Lite Maple

D4H
D4.5DL
D5V
Saffron

D4H
D4.5DL
D5V
Satin Grey

D4H
D4.5DL
D5V
Sage

D4H
D4DL
D4.5H
D4.5DL
D5DL
D5V
Nickel

D4H
D4.5DL
D5V
Indigo

D4H = Double 4" Horizontal
D4DL = Double 4" Dutchlap
D4.5H = Double 4.5" Horizontal
D4.5DL = Double 4.5" Dutchlap
D5DL = Double 5" Dutchlap
D5V = Double 5" Vertical