

## INTRODUCING



A new cost effective solution to add colour to vinyl windows and sliding patio doors



## Features and Benefits

- Multi-layered film is applied to vinyl using polyurethane reactive hot melt to create permanent bond between wrap and vinyl
- Easily withstands the most extreme heat and cold conditions
- Extremely resistant to scratches and abrasions
- Unaffected by environmental pollutants
- Performs well in sea-side applications
- Dirt and grime are easily cleaned away using normal mild household cleaners



Structure of the exterior film **RENOLIT** EXOFOL FC

TRANSPARENT POLYVINYLIDENE FLUORIDE (PVDF) LAYER


TRANSPARENT POLYMETHYL METHACRYLATE (PMMA) FILM PRINT

PRINT LAYER

PIGMENTED PMMA BASE FILM WITH SOLAR SHIELD TECHNOLOGY (SST)

PRIMER



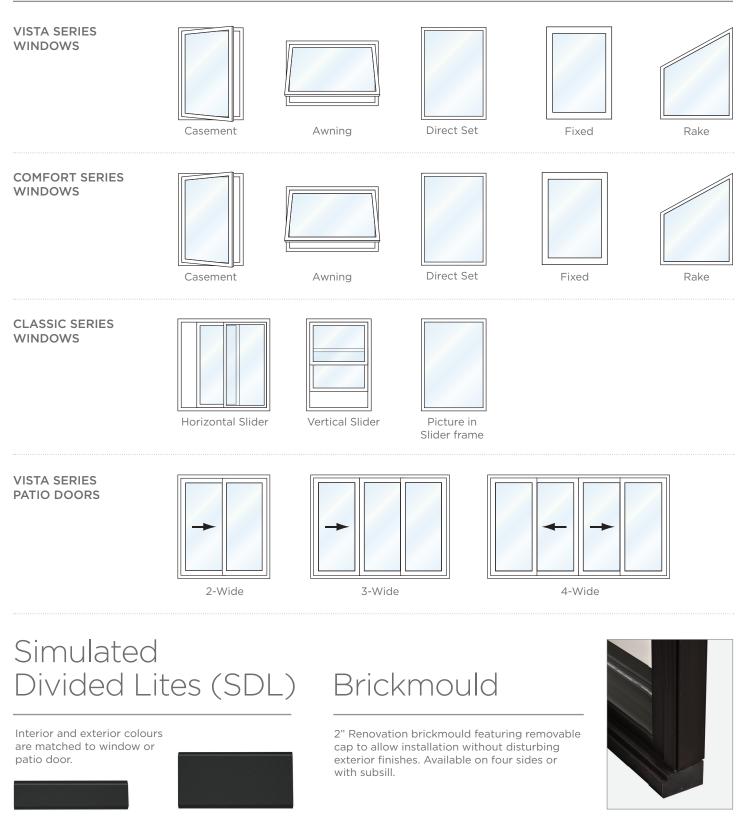

<sup>2&</sup>quot; Brickmould



2" SDL

1" SDL